



Layer picking applications have never been so versatile.

The Cascade Layer Picker adds flexibility to layer picking applications.

MODELS

- **Swing Model** Designed for pick line applications. Driver does not need to steer inside the rail just drive forward and back on the rail. The swing frame model comes with our special heavy duty mast and carriage reinforced to withstand the stress of side loading. It swings 90 degrees so you can handle more skus in half the space by being able to pick from both sides of the rail. The only one in the industry that can pick product from either side of the pick line requiring less space.
- **Stationary Side Mount** Used in applications utilizing one sided pick lines or can move independent of the rail. Sold with our special designed reinforced mast. The Layer Picker moves independently or with a Guide Rail System. This model is fixed in a side mounted position.
- **Stationary Carriage Mount** Requires no guide rail system or special mast. No space limitation. It is fixed in a front mounted position and does not move side to side. Typically used in warehousing operations where loads come in on a truck and they need to be split up into orders.
- **Stationary Fork Mount** Conveniently slips on your existing lift truck forks for quick installation and removal for occasional use in applications where the dedication of one truck to the layer picker is not necessary. By mounting it on a sideshifter you get added versatility. No Guide Rail System needed. This model is fixed in a front mounted position.

APPLICATIONS

Beverage, warehouses, and distribution facilities can benefit from the speed and versatility the Layer Picker offers. When building mixed-load pallets, the Cascade Layer Picker handles single layers or multiple layers of a variety of products, including both canned and bottled product. Replace costly manual labor with the versatile Cascade Layer Picker.


OPTIONS

- Lower Fork Carriage
- Center Load Support or "Chimney"
- Interlocking Finger Pads
- Product Guards
- Electronic 90° Stop Group
- Tray Pack Extension Hooks





LAYER PICKER

Stationary Carriage Mount





Swing Model
Special mast included.

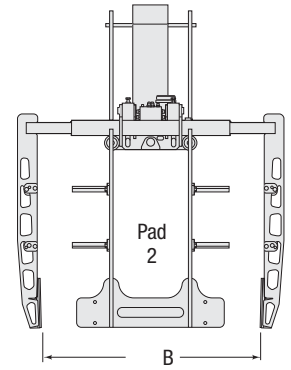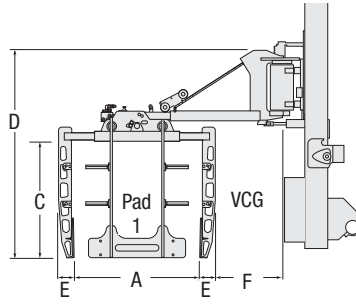

Stationary Side Mount
Special mast included.

Stationary Fork Mount

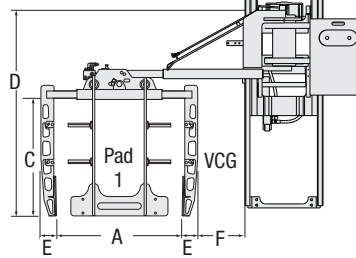

Catalog Order No.	Capacity @ 24" (600 mm) Load Center		Load Dimensions A x B	Load Height Max C	Weight Including Mast		Mounting Class	Pad 1 Size	Pad 2 Size	Overall Lowered Height	Lift Height	Overall Clamp Height D	Arm Width E	Extension F
	lbs	kg			lbs	kg								
Swing Model														
30B-LPD-B100	1,200	545	32" x 36"	35"	4,160	1,889	N/A	6" x 31"	6" x 31"	113.7"	87.5"	63.7"	5.0"	20.2"
30B-LPD-B200	1,200	545	36" x 42"	25"	4,150	1,884	N/A	12" x 42"	6" x 30"	113.7"	87.5"	53.7"	5.0"	20.2"
30B-LPD-B300	1,200	545	36" x 36"	25"	4,000	1,816	N/A	12" x 31"	6" x 31"	113.7"	87.5"	53.7"	5.0"	20.2"
30B-LPD-B400	1,200	545	48" x 36"	25"	4,310	1,957	N/A	12" x 48"	6" x 33"	113.7"	87.5"	53.7"	5.0"	20.2"
Swing Model Mono Stage Mast														
30B-LPM-B100	1,200	545	32" x 36"	35"	4,960	2,250	N/A	6" x 31"	6" x 31"	189.0"	120.0"	63.7"	5.0"	20.2"
30B-LPM-B200	1,200	545	36" x 42"	25"	4,950	2,245	N/A	12" x 42"	6" x 30"	189.0"	120.0"	53.7"	5.0"	20.2"
30B-LPM-B300	1,200	545	36" x 36"	25"	4,800	2,177	N/A	12" x 31"	6" x 31"	189.0"	120.0"	53.7"	5.0"	20.2"
30B-LPM-B400	1,200	545	48" x 36"	25"	5,110	2,313	N/A	12" x 48"	6" x 33"	189.0"	120.0"	53.7"	5.0"	20.2"
Stationary Side Mount														
30B-LPN-B100	1,200	545	32" X 36"	35"	4,140	1,878	N/A	6" X 31"	6" X 31"	113.7"	87.5"	63.7"	5.0"	20.2"
30B-LPN-B200	1,200	545	36" X 42"	25"	4,120	1,873	N/A	12" X 42"	6" X 30"	113.7"	87.5"	53.7"	5.0"	20.2"
30B-LPN-B300	1,200	545	36" X 36"	25"	3,980	1,805	N/A	12" X 31"	6" X 31"	113.7"	87.5"	53.7"	5.0"	20.2"
30B-LPN-B400	1,200	545	48" X 36"	25"	4,290	1,946	N/A	12" X 48"	6" X 33"	113.7"	87.5"	53.7"	5.0"	20.2"
Stationary Front Carriage Mount														
30B-LPH-B100	1,200	545	32" X 36"	35"	1,260	571	II/III	6" X 31"	6" X 31"	N/A	N/A	63.7"	5.0"	20.2"
30B-LPH-B200	1,200	545	36" X 42"	25"	1,250	567	II/III	12" X 42"	6" X 30"	N/A	N/A	53.7"	5.0"	20.2"
30B-LPH-B300	1,200	545	36" X 36"	25"	1,100	499	II/III	12" X 31"	6" X 31"	N/A	N/A	53.7"	5.0"	20.2"
30B-LPH-B400	1,200	545	48" X 36"	25"	1,410	639	II/III	12" X 48"	6" X 33"	N/A	N/A	53.7"	5.0"	20.2"
38B-LPH-B100	1,500	680	32" X 36"	35"	1,260	571	II/III	6" X 31"	6" X 31"	N/A	N/A	63.7"	5.0"	20.2"
38B-LPH-B200	1,500	680	36" X 42"	25"	1,250	567	II/III	12" X 42"	6" X 30"	N/A	N/A	53.7"	5.0"	20.2"
38B-LPH-B300	1,500	680	36" X 36"	25"	1,100	499	II/III	12" X 31"	6" X 31"	N/A	N/A	53.7"	5.0"	20.2"
38B-LPH-B400	1,500	680	48" X 36"	25"	1,410	639	II/III	12" X 48"	6" X 33"	N/A	N/A	53.7"	5.0"	20.2"
Stationary Front Fork Mount														
30B-LPF-B100	1,200	545	32" X 36"	35"	1,000	454	slip-on	6" x 31"	6" x 31"	N/A	N/A	63.7"	5.0"	20.2"
30B-LPF-B200	1,200	545	36" X 42"	25"	990	449	slip-on	12" x 42"	6" x 30"	N/A	N/A	53.7"	5.0"	20.2"
30B-LPF-B300	1,200	545	36" X 36"	25"	840	381	slip-on	12" x 31"	6" x 31"	N/A	N/A	53.7"	5.0"	20.2"
30B-LPF-B400	1,200	545	48" X 36"	25"	1,150	522	slip-on	12" x 48"	6" x 33"	N/A	N/A	53.7"	5.0"	20.2"
38B-LPF-B100	1,500	680	32" X 36"	35"	1,000	454	slip-on	6" x 31"	6" x 31"	N/A	N/A	63.7"	5.0"	20.2"
38B-LPF-B200	1,500	680	36" X 42"	25"	990	449	slip-on	12" x 42"	6" x 30"	N/A	N/A	53.7"	5.0"	20.2"
38B-LPF-B300	1,500	680	36" X 36"	25"	840	381	slip-on	12" x 31"	6" x 31"	N/A	N/A	53.7"	5.0"	20.2"
38B-LPF-B400	1,500	680	48" X 36"	25"	1,150	522	slip-on	12" x 48"	6" x 33"	N/A	N/A	53.7"	5.0"	20.2"

▶ Attachment capacity is a structural rating only. The type of product to be handled as well as the operating conditions must be considered to determine the working capacity for each application. Actual attachment/truck net working capacities must be obtained from the lift truck manufacturer. Only capacity ratings obtained from the lift truck manufacturer may be entered on the truck's nameplate.

▶ Consult Cascade for factory installation of Layer Picker attachments which includes models supplied with masts.