




Installation Instructions

Tilt Indicator Service Kit 6801758

This sheet describes installing a new button and shims to the tilt control indicator for added service life.

- 1** Tilt mast forward or remove tilt control indicator from mast. Adjust middle section so that the button is easy to access.
- 2** Remove the existing button from the tilt indicator middle section.
- 3** Install kit button and new shims (as required) into tilt control indicator.
- 4** Check tilt control indicator operation. The mast should stop at vertical and the switch roller should be on the button.

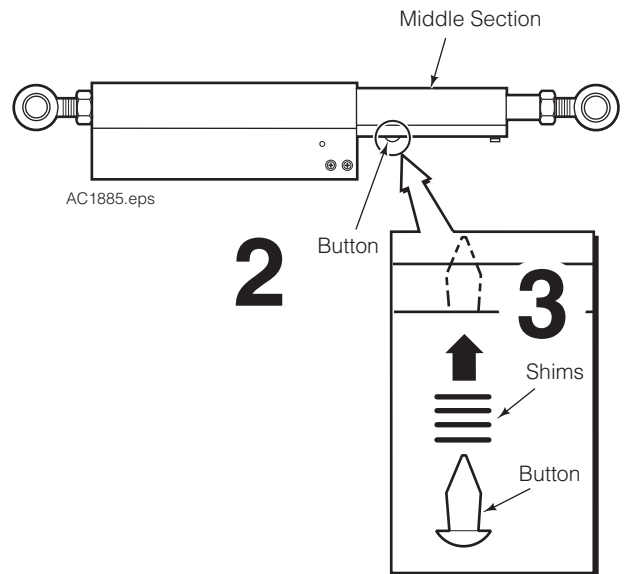

cascade[®]
corporation

For Technical Support . . .

Call: 1-800-227-2233 Fax: 1-888-329-8207
Internet: www.cascorp.com
Write: Cascade Corporation, PO Box 20187, Portland, OR 97294

To Order Parts . . .

Call: 1-888-227-2233 Fax: 1-888-329-0234
Internet: www.cascorp.com
Write: Cascade Corporation, 2501 Sheridan Ave., Springfield, OH 45505