



Installation Instructions


Cartridge Service Kits 656223, 664922, 664923 and 685092

This sheet provides instructions to properly install service kits 656223, 664922, 664923 and 685092.


1. Remove the existing O-rings and back-up rings from the cartridge.

IMPORTANT: When installing Service Kit 656223, only one of the sets of seals included in the kit will be required. Measure the cross-section of the O-rings (1/16 in. or 3/32 in.) removed from the cartridge. Install the set of seals with matching cross-section.


2. Clean the cartridge with kerosene or cleaning solvent.
3. Install the service kit O-rings and back-up rings as shown.
4. Lubricate the cartridge and seals with petroleum jelly prior to reassembly in the valve body.

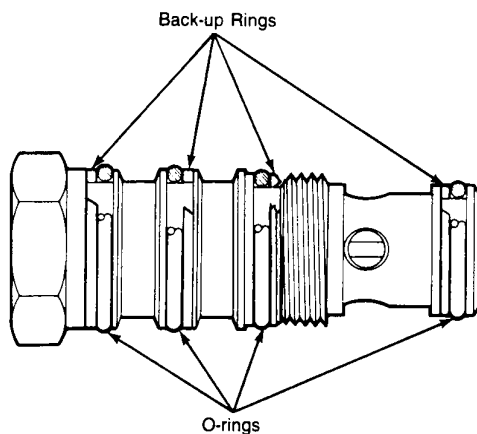

Service Kit 664922

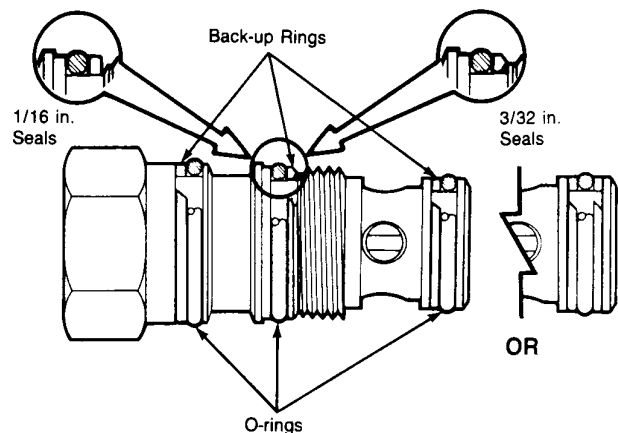

Service Kit 656223 & 685092

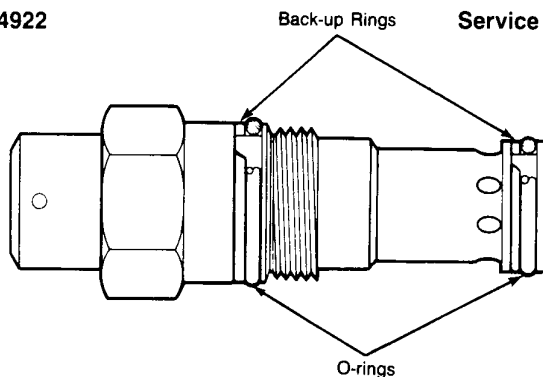

Service Kit 664923

NOTE: This information should not be interpreted as the basis for warranty claims unless so designated.

cascade[®] corporation

Cascade is a Registered Trademark of Cascade Corporation.
P.O. Box 20187 Portland, Oregon 97220 (503) 666-1518